



Title: Sound Absorption Test Results

Product: Ceiling Tile

Material: InvisiPerf Metal


Testing Standard: ASTM C423 (E-400 Mount)

About This Test: This test evaluates the effectiveness of a product to absorb sounds at multiple frequencies when installed in a typical ceiling grid.

Test Result Summary: NRC - 0.80; SAA - 0.79

NRC	SAA
0.80	0.79

Frequency (Hz)	Absorption Coefficient
100	1.09
125	0.86
160	0.81
200	0.93
250	0.94
315	0.81
400	0.75
500	0.65
630	0.77
800	0.76
1000	0.77
1250	0.78
1600	0.78
2000	0.76
2500	0.77
3150	0.76
4000	0.75
5000	0.72

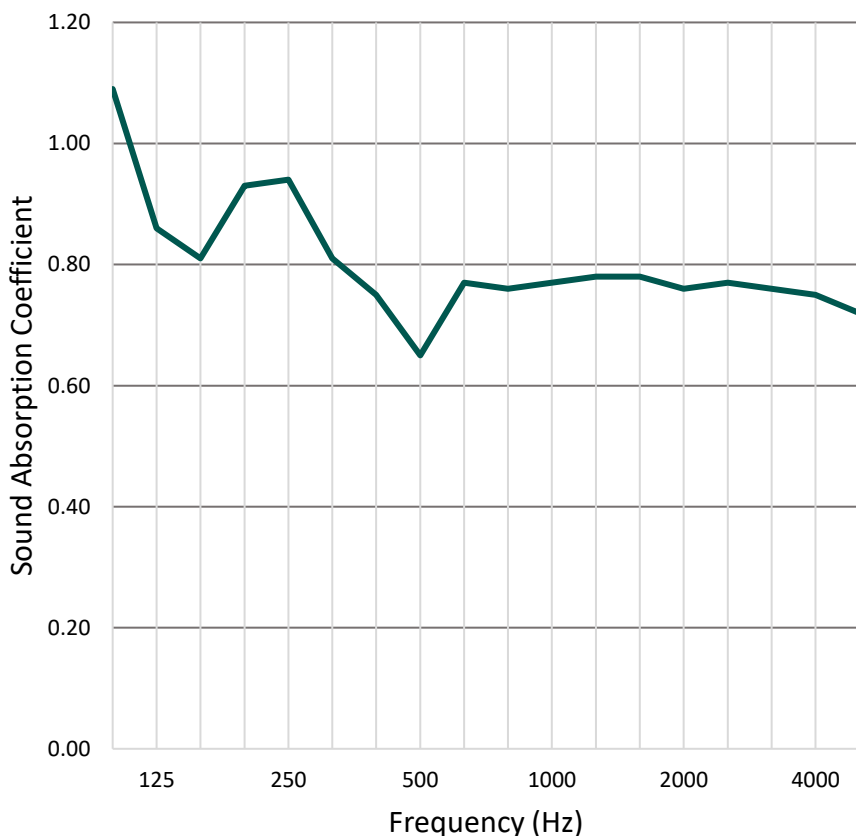

Test Date: 5/24/2010

Test ID: RAL-A10-100

MATERIAL LOGIQ TESTING DISCLAIMER

MATERIAL LOGIQ makes every effort to ensure the accuracy and reliability of the information provided. Laboratory testing is conducted by independent testing organizations. MATERIAL LOGIQ does not guarantee that field tests or independent tests will not vary. Acoustical Surfaces is a sister company of MATERIAL LOGIQ and is listed as the Manufacturer within the test report. The product referenced within the test report is the same MATERIAL LOGIQ product listed on this test coversheet.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

FOR: Rendered by Manufacturer and Released to:
Acoustical Surfaces, Inc., 123 Columbia Court N.
Chaska, MN 55318

Sound Absorption Test,
RAL™-A10-100

ON: Silk Metals Ceiling Panel

Page 1 of 4

CONDUCTED: 24 May 2010

TEST METHOD

The test method conformed explicitly with the requirements of the ASTM Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method: ASTM C423-09a and E795-05. Riverbank Acoustical Laboratories has been accredited by the

U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) for this test procedure (NVLAP Lab Code: 100227-0). A description of the measuring procedure and room qualifications is available separately.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the manufacturer as Silk Metals Ceiling Panel. The overall dimensions of the specimen as measured were nominally 2.4 m (94.5 in.) wide by 2.74 m (108 in.) long and 25.4 mm (1 in.) thick. The specimen consisted of twenty (20) pieces. Sixteen (16) pieces were nominally 600 mm (23.625 in.) wide by 600 mm (23.625 in.) long and 25.4 mm (1 in.) thick. Four (4) pieces were nominally 343 mm (13.5 in.) wide by 600 mm (23.625 in.) long and 25.4 mm (1 in.) thick. The specimen was tested in the laboratory's 292 m³ (10,311 ft³) test chamber.

The manufacturer's description of the specimen was as follows: Silk Metals Ceiling Panel. The tiles consisted of formed micro perforated metal panels. The metal steel thickness as measured was 0.38 mm (0.015 in.) thick.

The weight of the entire specimen as measured was 15.5 kg (34.3 lbs), an average of 2.3 kg/m² (0.48 lbs/ft²). The area used in the calculations was 6.6 m² (70.9 ft²). The room temperature at the time of the test was 21° C (70° F) and 62±1% relative humidity.

MOUNTING E-400

The test specimen was mounted with an airspace behind it. The number designates the distance in mm from the exposed face of the test specimen to the test surface. The perimeter was sealed using metal framing.

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

FOR: Rendered by Manufacturer and Released to:
Acoustical Surfaces, Inc., 123 Columbia Court N.
Chaska, MN 55318

RAL™-A10-100

24 May 2010

Page 2 of 4

TEST RESULTS

1/3 Octave Center Frequency (Hz)	Absorption Coefficient	Total Absorption In Sabins
100	1.09	77.41
** 125	0.86	60.92
160	0.81	57.09
200	0.93	65.67
** 250	0.94	66.41
315	0.81	57.77
400	0.75	52.88
** 500	0.65	46.28
630	0.77	54.48
800	0.76	53.88
** 1000	0.77	54.27
1250	0.78	55.02
1600	0.78	55.22
** 2000	0.76	54.09
2500	0.77	54.57
3150	0.76	53.90
** 4000	0.75	53.10
5000	0.72	51.38

SAA = 0.79

NRC = 0.80

This report shall not be reproduced except in full, without the written approval of RAL.
THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134

Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

FOR: Rendered by Manufacturer and Released to:
Acoustical Surfaces, Inc., 123 Columbia Court N.
Chaska, MN 55318

RAL™-A10-100

24 May 2010

Page 3 of 4

TEST RESULTS (Continued)

The sound absorption average (SAA) is defined as a single number rating, the average, rounded to the nearest 0.01, of the sound absorption coefficient of a material for the twelve one-third octave bands from 200 through 2500 Hz, inclusive.

The noise reduction coefficient (NRC) is defined from previous versions of this same test method as the average of the coefficients at 250, 500, 1000, and 2000 Hz, expressed to the nearest integral multiple of 0.05.

Tested by Marc Sciaky Approved by David L. Moyer
Marc Sciaky
Experimentalist
David L. Moyer
Laboratory Manager

This report shall not be reproduced except in full, without the written approval of RAL.
THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

RIVERBANK ACOUSTICAL LABORATORIES

1512 S. BATAVIA AVENUE
GENEVA, ILLINOIS 60134


Alion Science and Technology

630/232-0104
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

TEST REPORT

SOUND ABSORPTION REPORT RAL-A10-100

Page 4 of 4

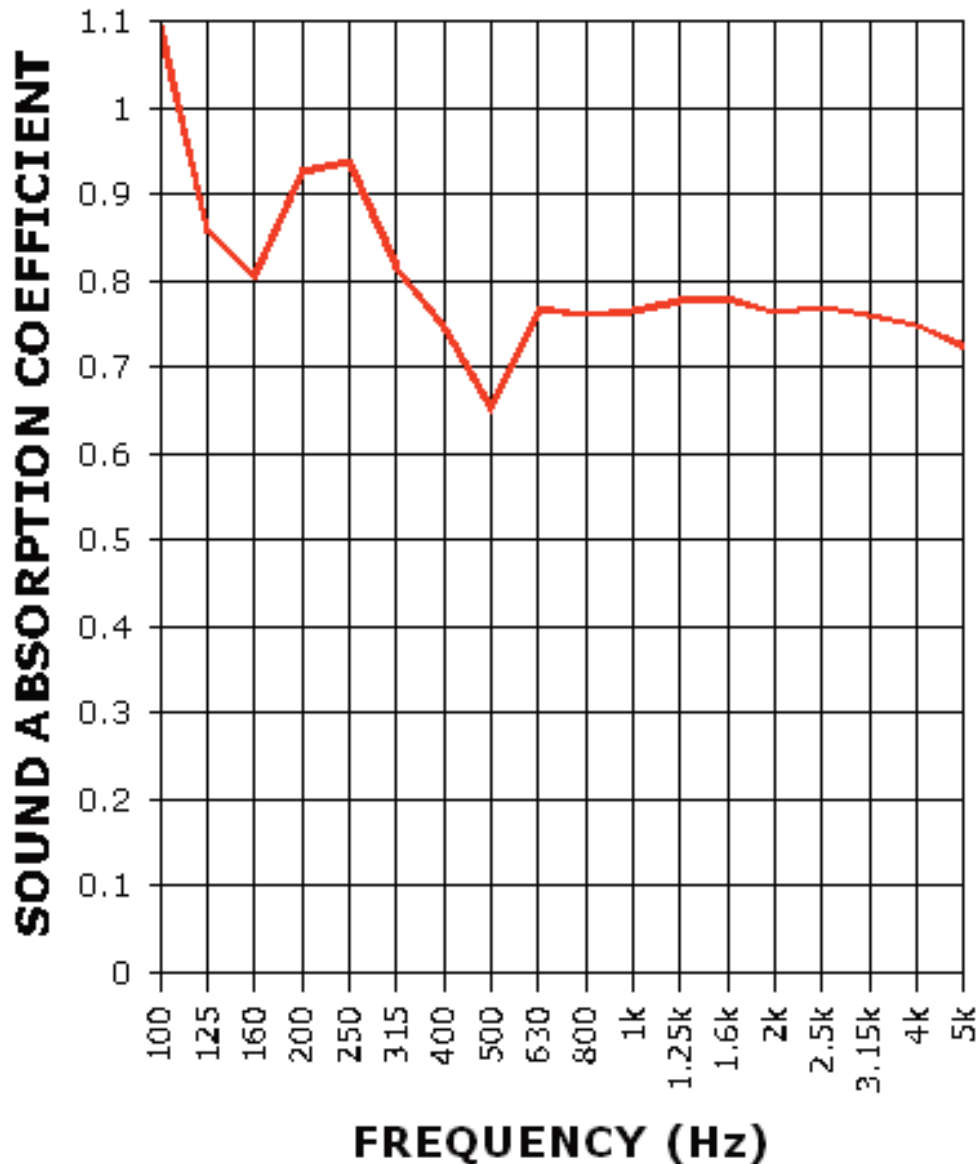

SAA=0.79
NRC=0.80

This report shall not be reproduced except in full, without the written approval of RAL.
THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.