



PLANQ

PET FELT PANELS

PLANQ

PET FELT PANELS

PLANQ is the Swiss Army knife of aesthetics and acoustics. Available in 12 sizes that can be mix and matched, rotated, or staggered at installation to create beautiful wall and ceiling scapes. With PLANQ, quiet never looked so chic.

- Pre-Engineered systems designed for customized expressions and quick delivery
- 12 sizes with limitless combinations
- Available in a wide variety of colors and wood grain prints
- NRC rating of 0.40 for 1/2", or up to 0.95 for 2" PLANQ

SPECS

Material Composition: 60% Post-Consumer Recycled PET Felt

Panel Thickness: 3/8", 1/2", 1", 2"

Panel Width: 4", 6", 8". Custom widths available.

Panel Length: 12", 24", 48", 96". Custom widths available.

Edge Detail: Square, Bevel

Installation Method: Adhesive

Fire Rating: Class A Fire Rated per ASTM E84


VOC Emissions: Passes CDPH Standard v1.2




DIMENSIONS

PLANQ

PLANQ is available in 12 sizes that can be mix and matched, rotated, or staggered for nearly infinite design variability at installation.

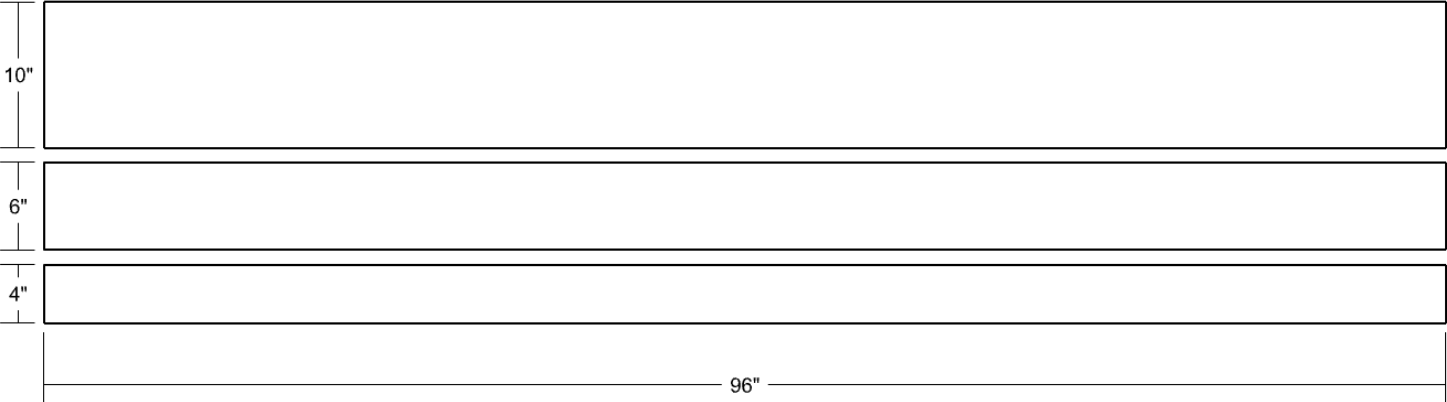

EDGE DETAIL - SQUARE

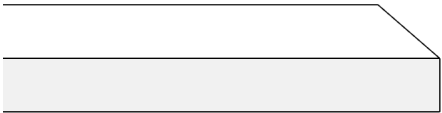

EDGE DETAIL - BEVEL



COLORS

Decorative and tackable, available in a variety of colors or printed with wood grain or custom graphics to blend into any decor.


Class A Fire Rated Colors



Non-Fire Rated Colors



Printed Wood Grain

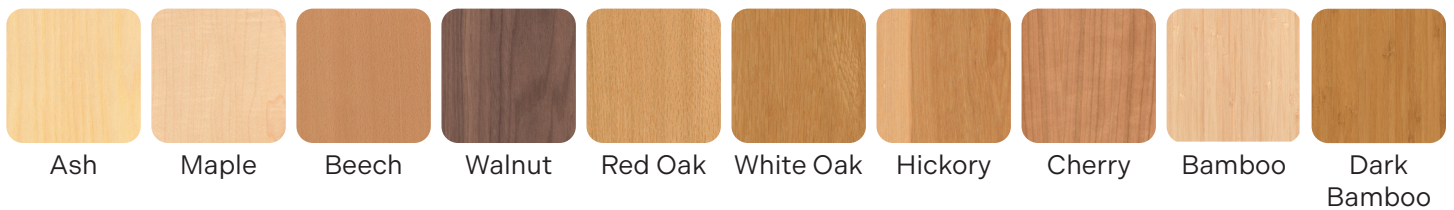

PERFORMANCE

Material Logiq PET Felt is non-allergenic, non-toxic, fungal-resistant, and does not contain chemical irritants or formaldehyde. Acoustic panel material: 100% polyester (60% PET-recycled fiber, 40% PET-virgin fiber). Our PET Felt passes the CDPH V1.2 test standard for low VOC emissions and can contribute to LEED V4.1 EQ Credit: Low-Emitting Materials.

