



TRELL

INVISIPERF METAL

TRELL

INVISIPERF METAL

TRELL redefines the open-cell ceiling. Its modular triangular cells, crafted from our patented InvisiPerf Metal, achieve an exceptional NRC of 0.80 without any need for sound-absorbing backer or infill panels. This allows you to design dramatic, open-grid aesthetics that perform like a closed ceiling, all with a simple two-piece assembly system that simplifies installation.

- Large open area easily integrates lighting, HVAC, and sprinkler systems
- Modular two-piece system for design flexibility and efficient installation
- Available in multiple colors and premium finishes
- Class A Fire-rated for confident specification

SPECS

Material Composition: Aluminum with ultra micro perforations

Cell Shape: Triangular

Cell Size (On Center): Triangular Side Length 12", 24", 48", Custom up to 72"

Height: 4" to 12"

Installation Method: Threaded Rod, Hanging Wire

NRC Rating: 0.80


Fire Rating: Class A Fire Rated per ASTM E84



SCALE

TRELL

Available in a variety of cell sizes and heights to meet the needs of any space

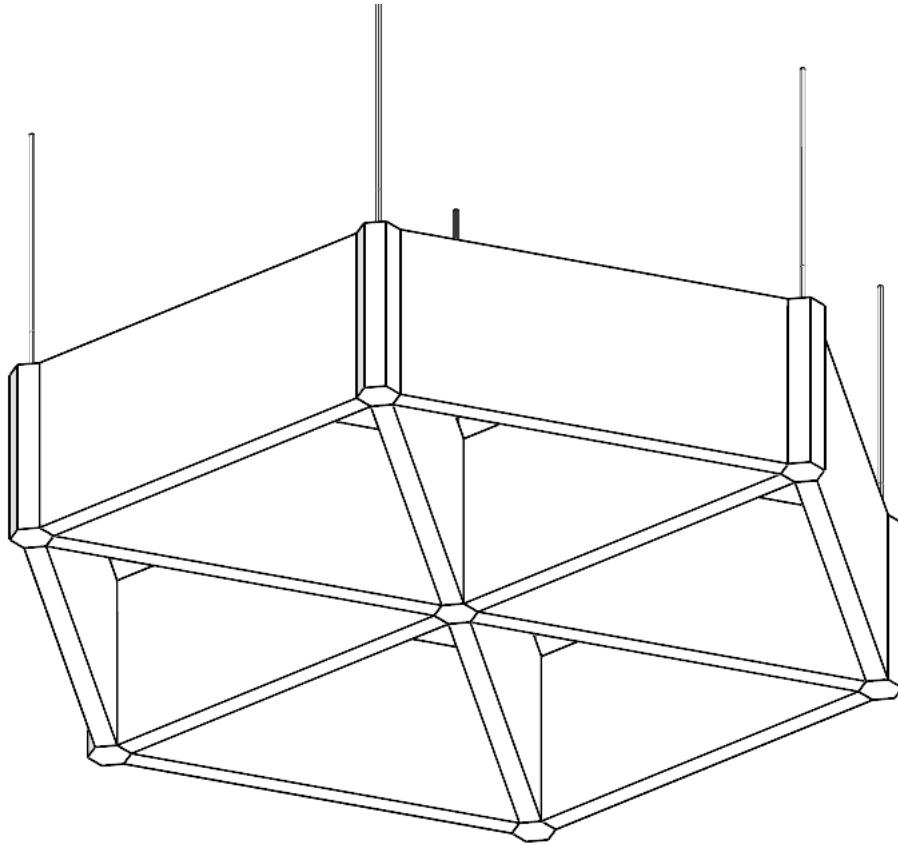

Triangle Side Length: 12", 24", 36"



FINISH

Enhance your design with a spectrum of powder-coated colors, printed wood grain, or printed stone textures.


Powder-Coated Colors




Snow White




Cloud Gray




Black



Beige White



Ivory White




Dark Brown



Pearl Yellow



Aqua Green



Sky Blue

Printed Textures



Teak



Dark Teak



Silver Teak



Granite



Oak



Red Oak



Light Oak



Biostone



Old Oak



Red Chestnut



Washed Maple



Slate

PERFORMANCE

The performance of InvisiPerf Metal is rooted in its patented, angled ultra micro-perforation technique. This departure from conventional 90° larger perforation methods optimizes the panel's surface to deliver exceptional sound absorption without needing acoustic infill. This breakthrough technology is the secret to achieving a visually seamless, monolithic aesthetic while meeting demanding acoustic requirements.

