



SLATTA

WOOD SLAT ACOUSTIC PANEL



MATERIAL LOGIQ

SLATTA

WOOD SLAT ACOUSTIC PANEL

What if we told you that you could combine the warmth of natural wood with the sustainable sound-absorbing properties of a recycled PET felt backer? That's the promise of Slatta. Sounds pretty good, huh?

- Pre-Engineered systems available for quick delivery.
- Available in a variety of wood species and finishes.
- Customizable slat width, spacing, and thickness.
- NRC rating of 0.60.

SPECS

Backer Material: 60% recycled PET felt available in 1/2", 1" thicknesses.

Slat Material: Solid Wood, Black Fire-Rated MDF.

Slat Thickness: Solid Wood 1/2", 3/4", custom thicknesses available. Black FRMDF 1/2", 3/4".

Slat Width: 1". Custom widths available.

Slat Edge Detail: Square.

Panel Width: 22-1/2". Custom widths available up to 48".

Panel Length: 108". Custom lengths available up to 120".

Installation Method: Direct Attach.


VOC Emissions: PET felt backer passes CDPH Standard v1.2. Class A FRMDF is CARB Phase 2 compliant and is rated as Class E1 for formaldehyde emissions.




EXPRESSIONS

Slatta Wood Slat Panel


Slatta Panels are available in a variety of wood species and sizes to meet the needs of any project.

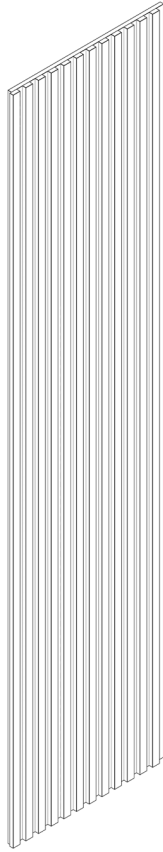

Standard Slats 2ft x 9ft

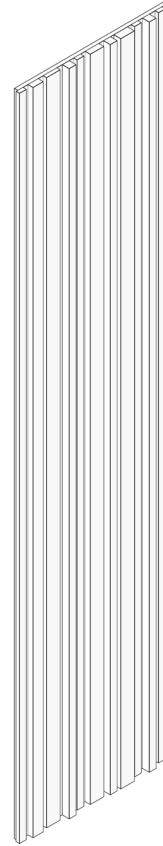

Variable Slats 2ft x 9ft

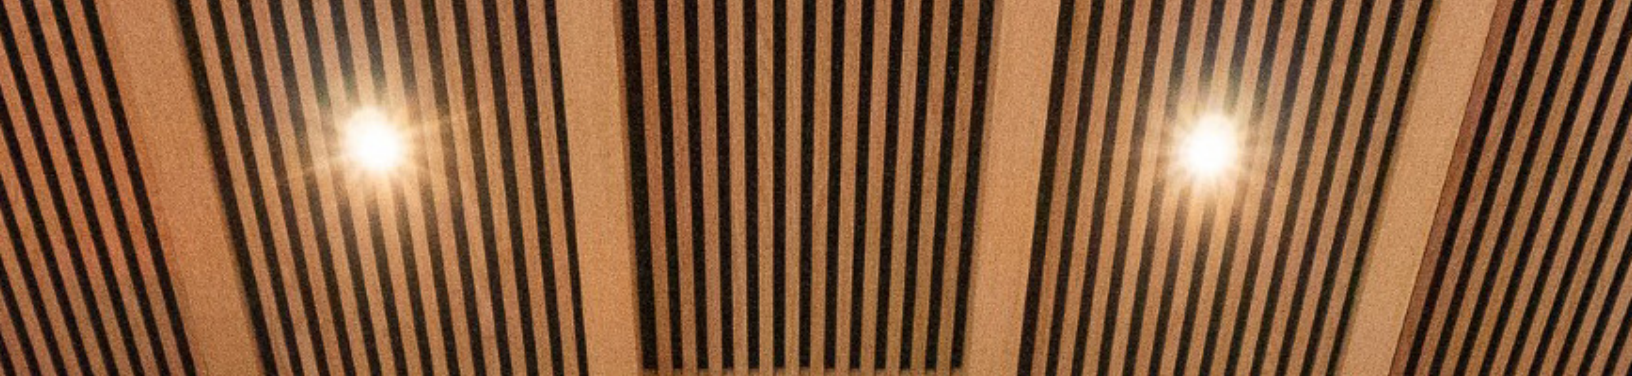

ESSENTIAL COLORS



LUXE COLORS



WOOD SPECIES



Due to variance in monitor and print settings, please verify PET felt color by requesting a material sample.