




MATERIAL LOGIQ

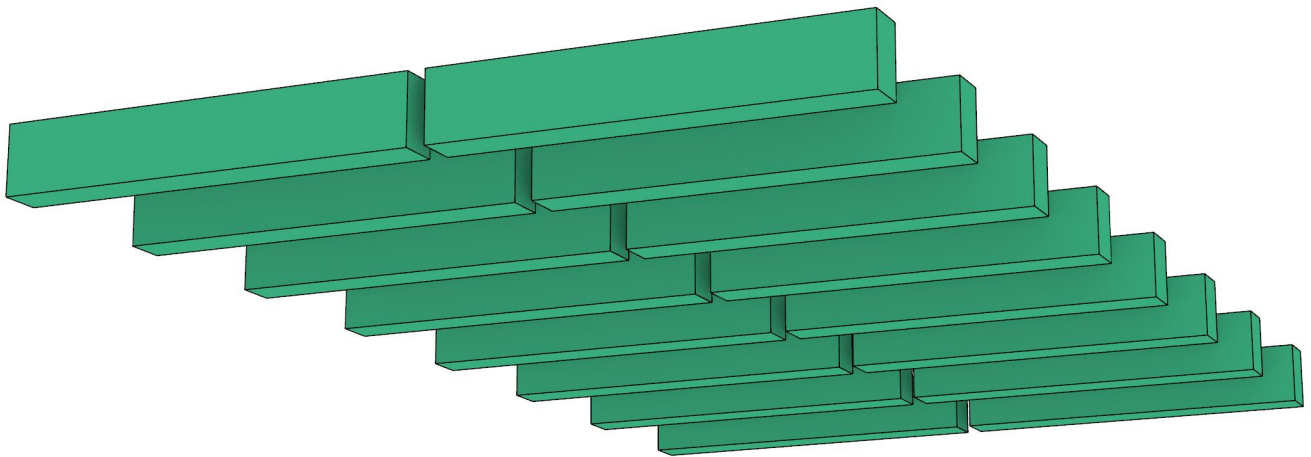

INSTALLATION INSTRUCTIONS: **BEAM**

INSTALLATION METHOD: **1/4 - 20 HANGER**

Overview // Parts and Hardware

ATTENTION: If you have additional questions after reviewal of this manual please contact your local MATERIAL LOGIQ representative or a MATERIAL LOGIQ professional at our headquarters (800)220-8412

MATERIAL LOGIQ MANUFACTURES PRODUCTS THAT MUST BE HANDLED WITH CARE. PRODUCTS SHOULD ONLY BE INSTALLED BY EXPERIENCED INSTALLERS.

RECEIVING

Prior to unpacking, check package for any obvious shipping damage. If no evidence of damage is present, move package to a dry/controlled area and inspect it for dents, breakage, or any lesser-noticable damage that may affect enclosed panels. If damage has been identified, record it/photograph it, and open to inspect for concealed damage. If damage was transferred to the product, document/photograph the issues.

SPECIAL HANDLING INSTRUCTIONS


When handling product, care must be taken to not damage the faces. Handle all edges with care. To avoid damage, do not twist or bow product during installation.

INCLUDED COMPONENTS:




①

ASSEMBLED BEAM




②


BEAM CLIP



Threaded Rod



Aircraft Cable





Unistrut

③

HANGING HARDWARE

Hardware//Hanging

- 1 Identify pick location for each Beam. Using pre-installed beam hardware to determine spacing, measure and mark location of pick points.

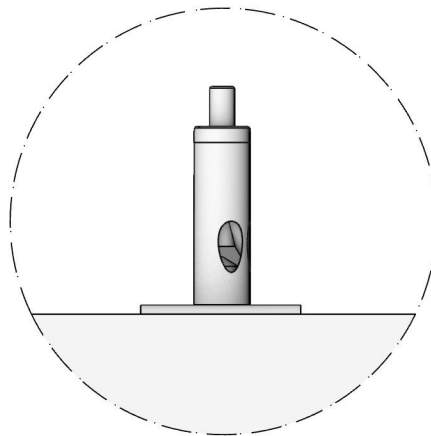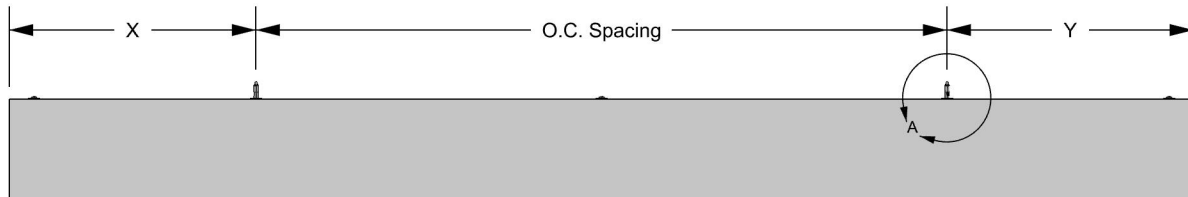

DETAIL A:
Pre-installed Hanging Hardware

- 2 Suspend Beam and level. Repeat until all beams are installed. Installation is complete.

