



# TOPO

ACOUSTIC CEILING  
BAFFLES



MATERIAL LOGIQ



Topo gives open ceilings a topography. Individual PET felt blades build into a rolling baffle system, and are available in two standard profiles, the angular Zig and the curved Swell. It's a sculptural system engineered with enough range to match your design intent.

### KEY INFO

|                 |                                                                    |
|-----------------|--------------------------------------------------------------------|
| Material:       | 1/2" recycled PET felt                                             |
| Acoustics:      | Up to 1.05 NRC rating                                              |
| Fire Rating:    | Class A                                                            |
| Warranty:       | 1 year                                                             |
| Sustainability: | UL GREENGUARD Gold<br>60% recycled content<br>HPD<br>Declare label |

### SPECS

|                      |                                                                 |
|----------------------|-----------------------------------------------------------------|
| Blade Profile:       | Zig, Swell                                                      |
| Blade Length:        | 24" – 108"                                                      |
| Blade Height:        | 8", 10", 12"                                                    |
| Blade Spacing:       | 8" on-center                                                    |
| Module Type:         | Full, Edge                                                      |
| Suspension Type:     | Independent, framed                                             |
| Installation Method: | Cable, threaded rod, unistrut, t-grid, direct attach            |
| Finishes:            | 12 Essential colors<br>26 Luxe colors<br>10 wood grain textures |


### CUSTOM OPTIONS

Every Material Logiq system is designed to be adapted – modified in size, shape, finish, and configuration to fit your project, not the other way around.


|                |                           |
|----------------|---------------------------|
| Blade Profile: | Custom profiles available |
|----------------|---------------------------|

# DETAILS


## Module Components

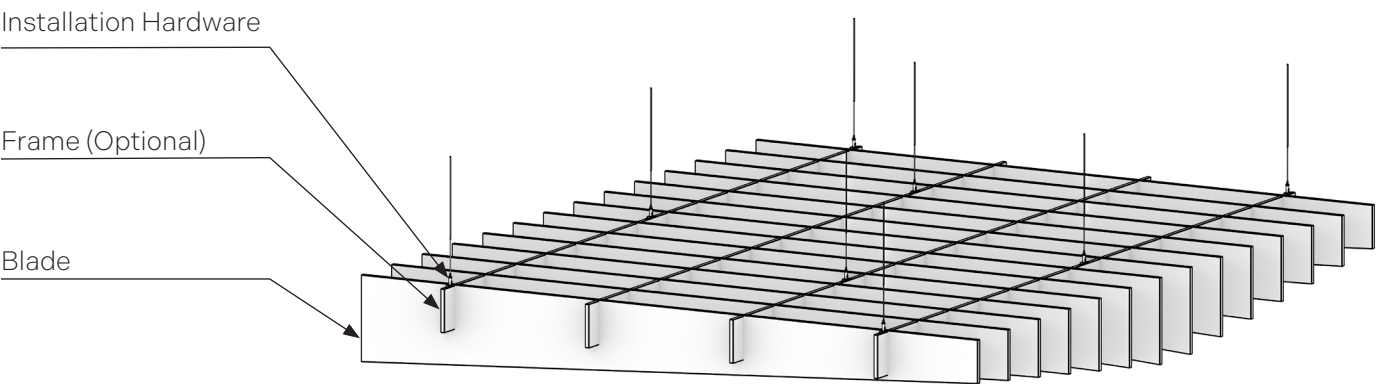

## Baffle Profile: Zig

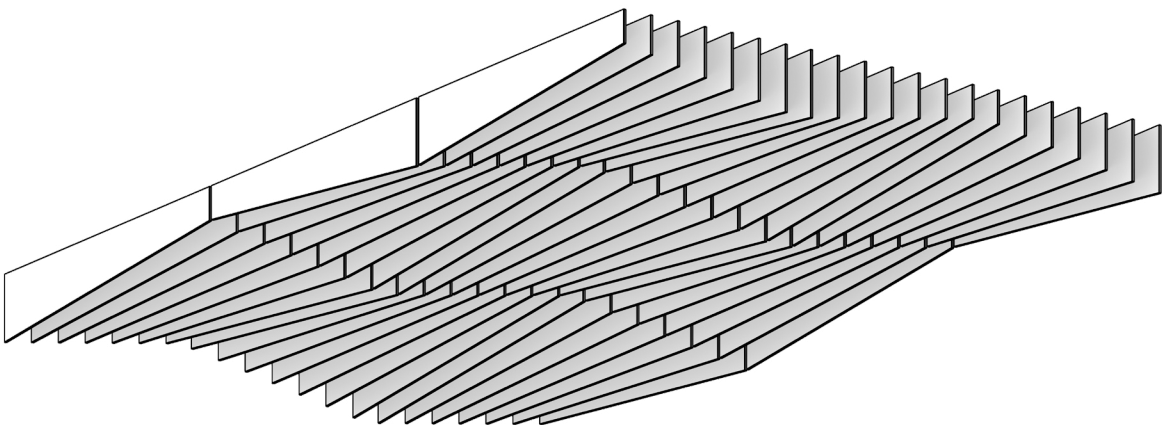


## Baffle Profile: Swell

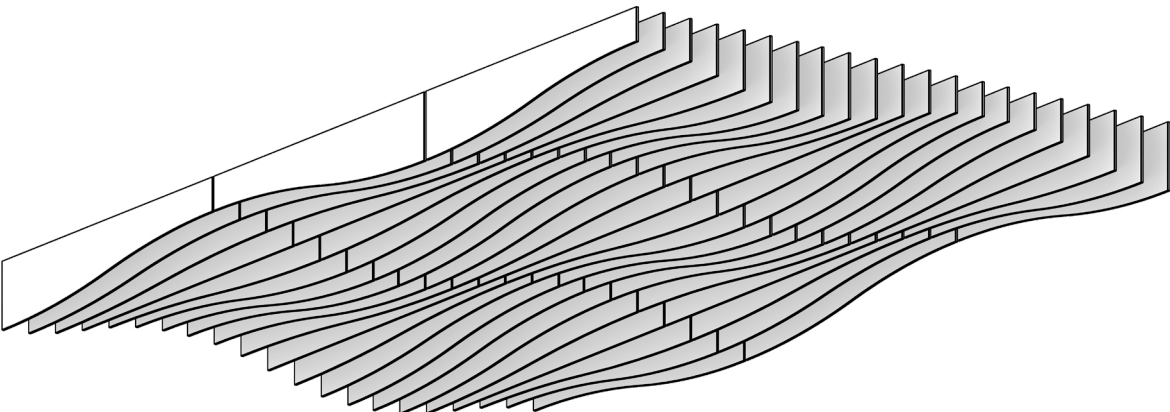


# DIMENSIONS & EDGE TYPE

## Blade Length, Height, and Spacing

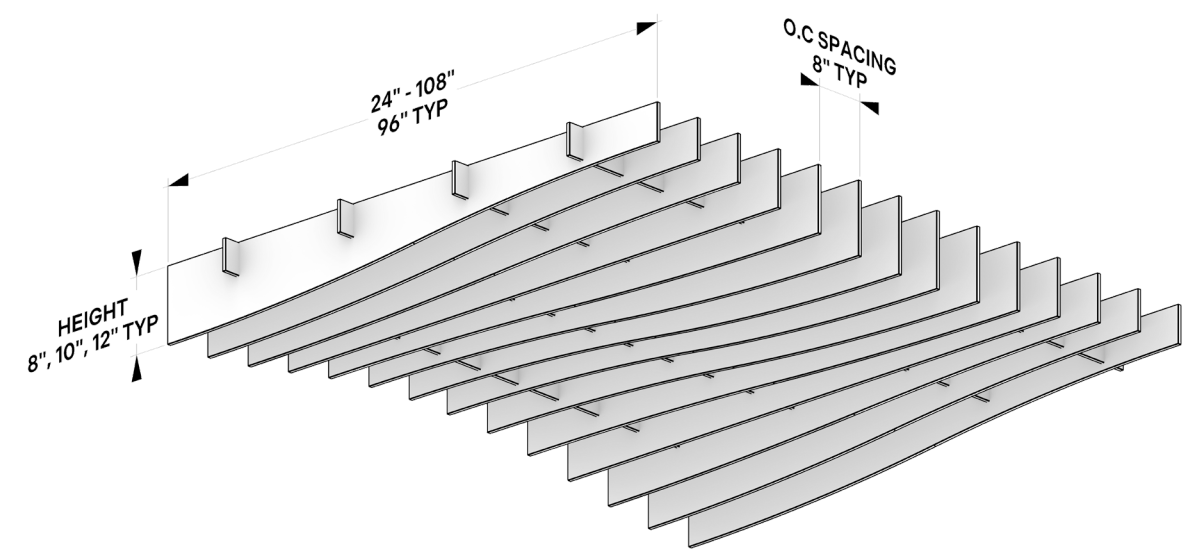


## Edge Type

### Wave Edge

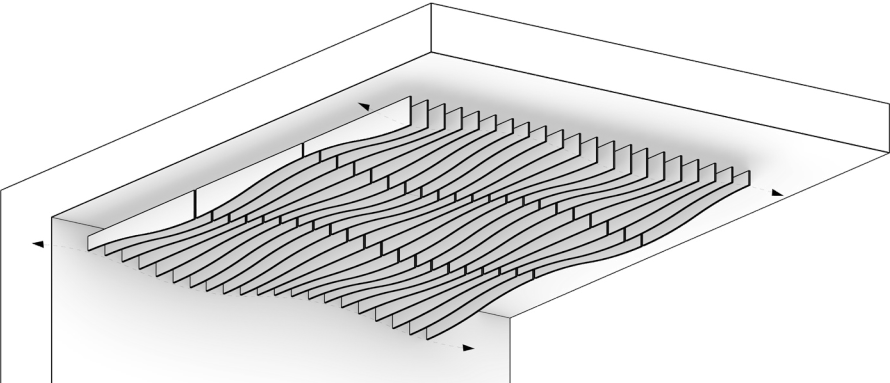

### Level Edge

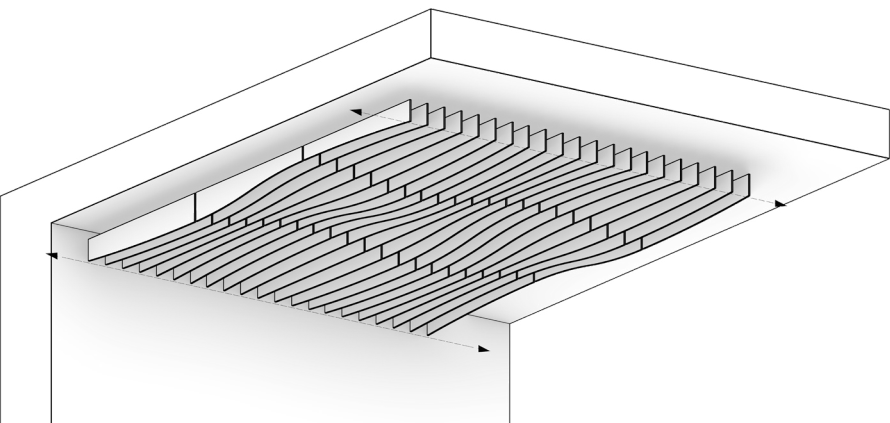


# SUSPENSION TYPE

---

## Independent

---


*Beneficial for installation flexibility, and on-the-jobsite spacing adjustments*

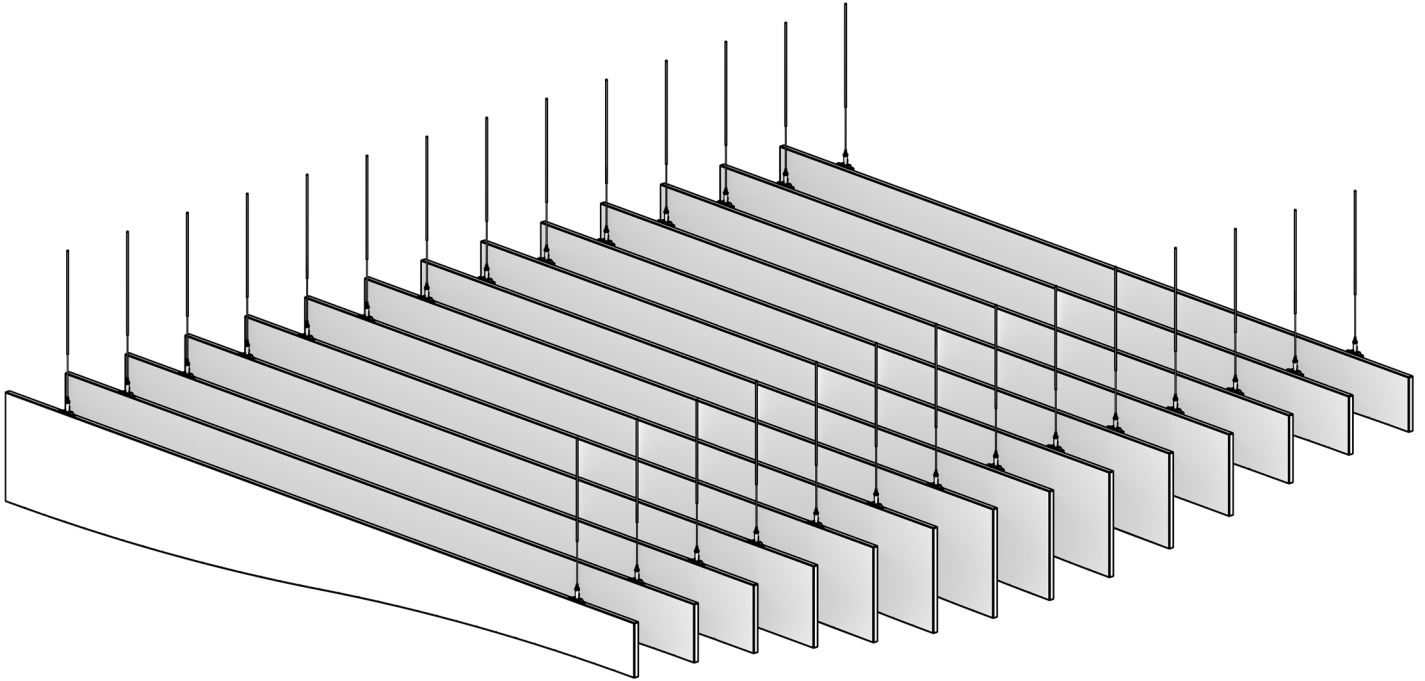

## Framed

---

*Beneficial for large ceiling installations*

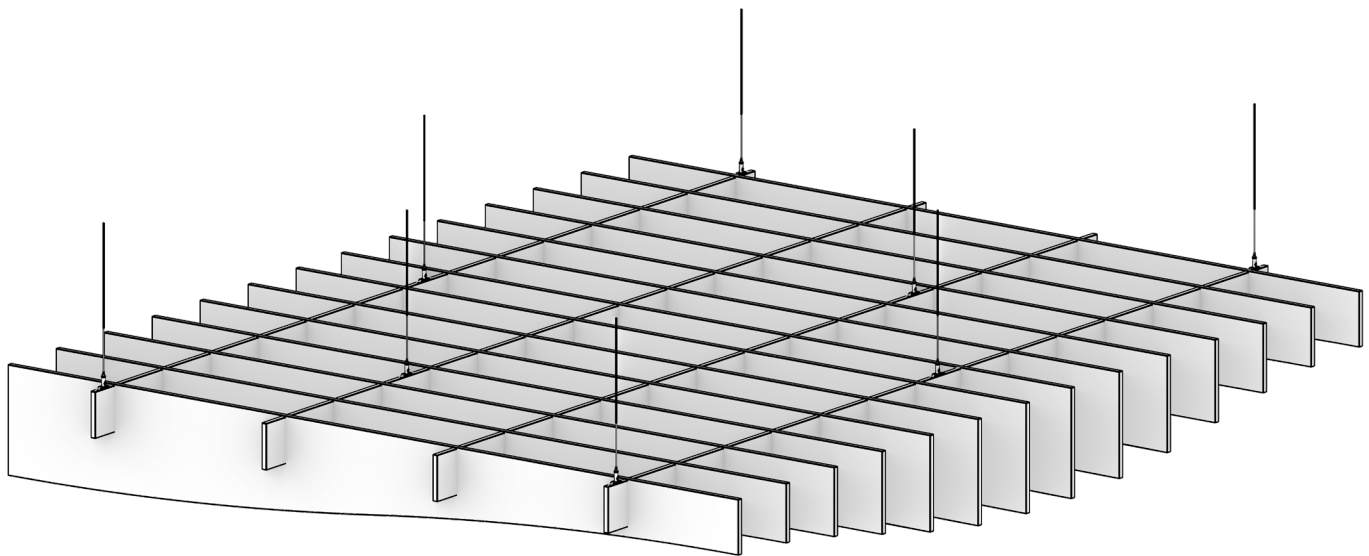


# INSTALLATION METHOD

---


Cable

---

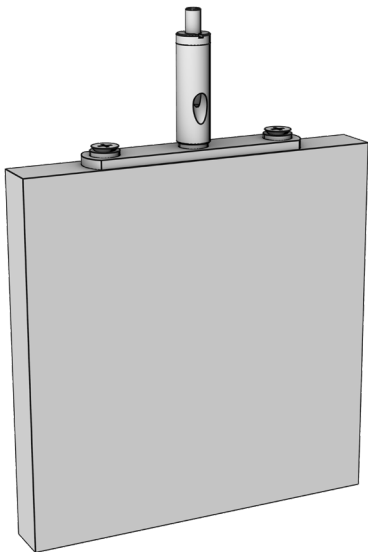


Unistrut

---

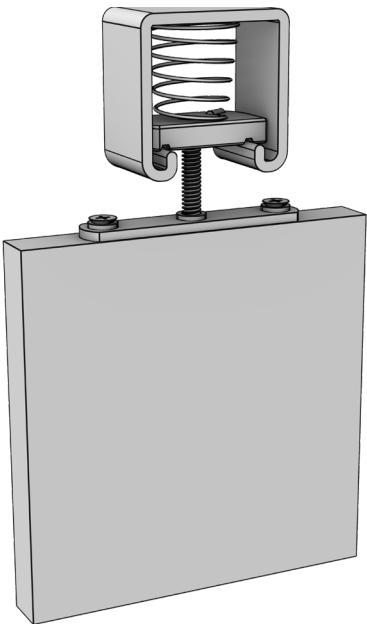


Threaded Rod

---

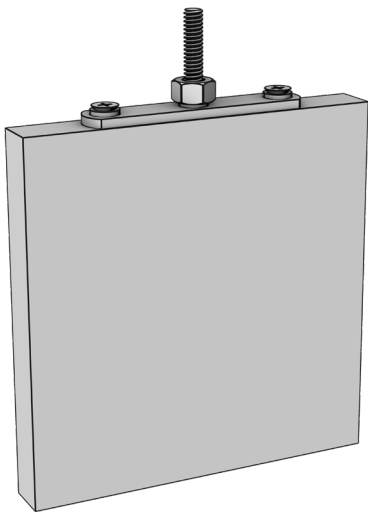

T-Grid

---

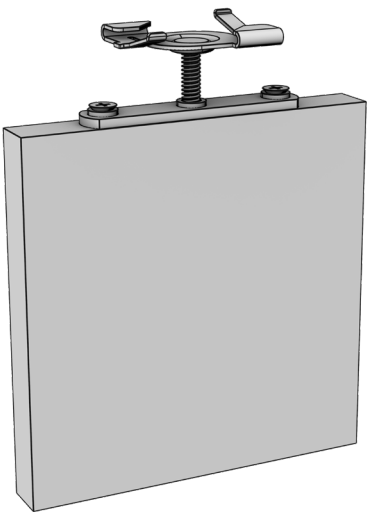


# LUXE COLORS

## COLORS AND FINISHES

---



**Quarry Stone**



**Taconite Gray**



**Gunflint**



**Morel**



**Driftless Stone**



**Sandpiper**



**Prairie Sand**



**Toasted Grain**




**Winter Sunrise**



**Iron Range**



**Cardinal**



**Golfinch**



**Marigold**



**Superior Fog**



**Sea Glass**




**Belize**



**Deep Lake**



**Boundary Waters**



**Wild Lavender**




**Cornflower**



**Mint Mist**



**Spring Bud**



**Lichen**



**Evergreen**



**Spruce Shadow**



**Northern Night**

---

*Due to color variance in monitor and print settings, please verify PET felt color by requesting a material sample.*

# ESSENTIAL COLORS

## COLORS AND FINISHES

---




White



Silver



Smoke



Gray



Black



Beige



Tan



Brown




Orange



Red



Lime



Blue



Purple

---

*Due to color variance in monitor and print settings, please verify PET felt color by requesting a material sample.*

# WOOD GRAIN TEXTURES

## COLORS AND FINISHES

---



Ash



Black Walnut



Charred Ash



Cherry



Maple



Peeled Birch



Red Oak



Rough Oak



Teak



White Oak


---

*Due to color variance in monitor and print settings, please verify PET felt color by requesting a material sample.*

# PERFORMANCE DATA

GRILLA

## ACOUSTIC PERFORMANCE

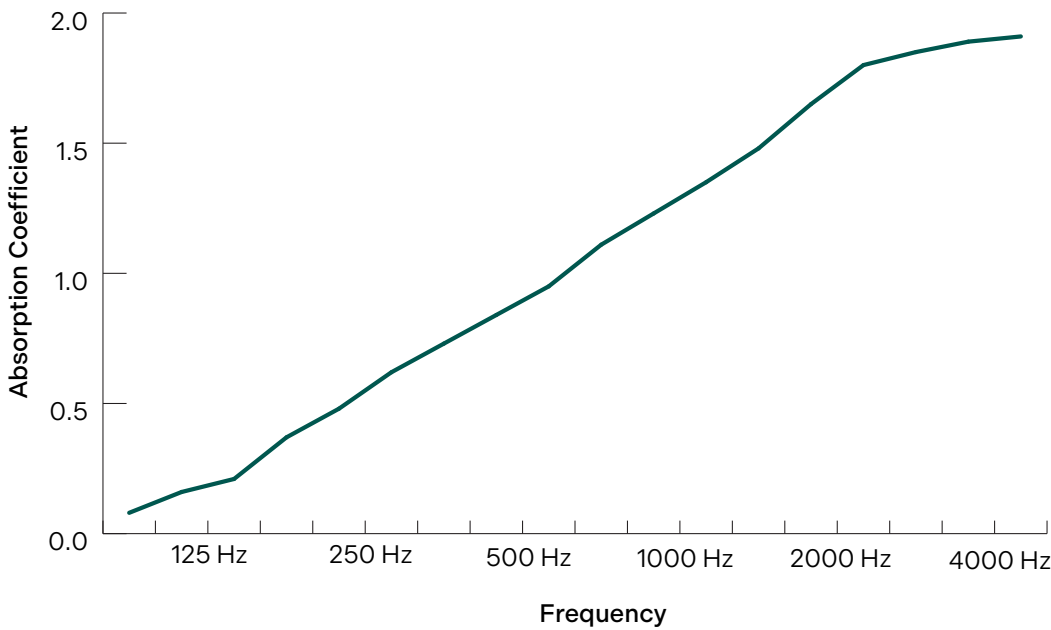

| Product               | Mounting | Spacing  | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | NRC  |
|-----------------------|----------|----------|--------|--------|---------|---------|------|
| 11.5" PET Felt Baffle | J-Mount  | 11" o.c. | 0.48   | 0.73   | 1.23    | 1.89    | 1.05 |

## ADDITIONAL TESTING

|                    |                          |
|--------------------|--------------------------|
| Fire Rating:       | Class A per ASTM E84     |
| Light Reflectance: | 87                       |
| Fungi Resistance:  | High - Passes ASTM C1338 |

## CERTIFICATIONS

